



Product Data Sheet	16/6/21	Version 1.4
---------------------------	---------	-------------

Product:	Insulfix Track - Double
Code:	R130D

Description


Insulfix Track - Double provides a quick, easy and reliable way to correctly install insulation between double rafters. It can be used when installing boards from Inside the Roof and Outside the Roof.



Suitable Rafter:	Double
Rafter Width Range:	90mm to 105mm
Minimum Rafter depth:	130mm

Technical Information

Dimensions	
Length	2400mm
Width	97mm
Height	130mm
Retaining ledges	23mm
Thickness	1mm



Characteristics	
Material	uPVC
Colour	White
Proportion of recycled uPVC	50%


On-Site Information

Suitable Fixings

Nails:	Yellow Passivated Annular Ring Nails	Diameter: 3.0mm	Length: 30mm
Screws:	Coarse Thread Screws	Diameter: 3.5mm	Length: 35mm

Fixing Pattern

Fix directly through the vertical sides of the uPVC Track into the rafter at 150mm in from each end and staggered at a maximum of 700mm centres.

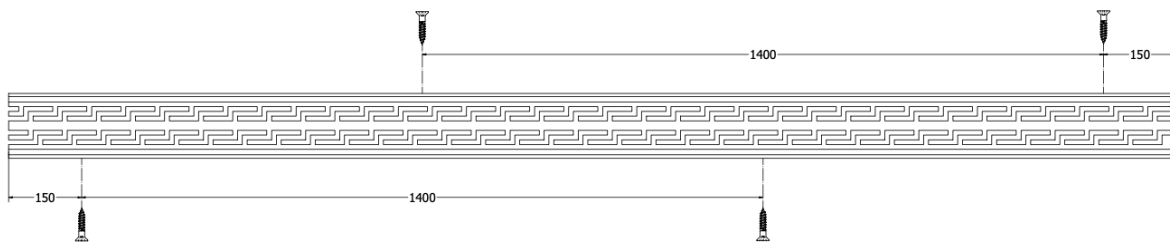

Insulation Type

The following are suitable for use with Insulfix Track:

- PIR boards

Insulation Thickness

Maximum: 130mm

Note: Always check the maximum insulation thickness tolerance with the manufacturer. You may need to specify 125mm to ensure that the board never exceeds the 130mm limit

Minimum: 50mm

Installation Guidance

See our **installation videos** when installing from 'Inside the Roof' and 'Outside the Roof' at Insulfix.co.uk