



Product Data Sheet	16/6/21	Version 1.4
--------------------	---------	-------------

Product:	Insulfix Track - Half
Code:	R130H

**Description**


**Insulfix Track - Half** provides a quick, easy and reliable way to correctly install insulation between rafters where access to one side is restricted. It can be used when installing boards from Inside the Roof and Outside the Roof.



Suitable Rafter:	Single/Double/Multiple
Rafter Width Range:	47mm & above
With width trimmed:	35mm & above
Minimum Rafter depth:	130mm

**Technical Information**

Dimensions	
Length	2400mm
Width	49mm
Height	130mm
Retaining ledge	23mm
Thickness	1mm

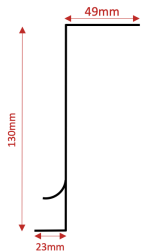

Characteristics	
Material	uPVC
Colour	White
Proportion of recycled uPVC	50%


**On-Site Information**

**Suitable Fixings**

Nails:	Yellow Passivated Annular Ring Nails	Diameter: 3.0mm	Length: 30mm
Screws:	Coarse Thread Screws	Diameter: 3.5mm	Length: 35mm

**Fixing Pattern**

Fix directly through the vertical sides of the uPVC Track into the rafter at 150mm in from each end and at a maximum of 700mm centres.

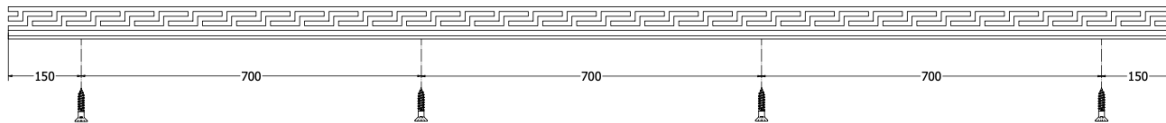

**Insulation Type**

The following are suitable for use with Insulfix Track:

- PIR boards

**Insulation Thickness**

Maximum: 130mm

**Note:** Always check the maximum insulation thickness tolerance with the manufacturer. You may need to specify 125mm to ensure that the board never exceeds the 130mm limit

Minimum: 50mm

**Installation Guidance**

See our **installation videos** when installing from 'Inside the Roof' and 'Outside the Roof' at [Insulfix.co.uk](http://Insulfix.co.uk)